

HM-2X50A 规格书(交流电源滤波器)

技术参数 Specification

额定电压 Rated voltage 220/250VAC

工作频率 Operating frequency 60Hz

额定电流 Rated current 50A

气候类别 Climatic category 25/085/21


漏电流 Leakage current 100mA@220V/60Hz

试验电压 Test voltage (2s/1Min)

线 - 线 Line-to-line: 1000VDC

线 - 壳 Line-to-case: 1000VDC

外形尺寸 Dimension

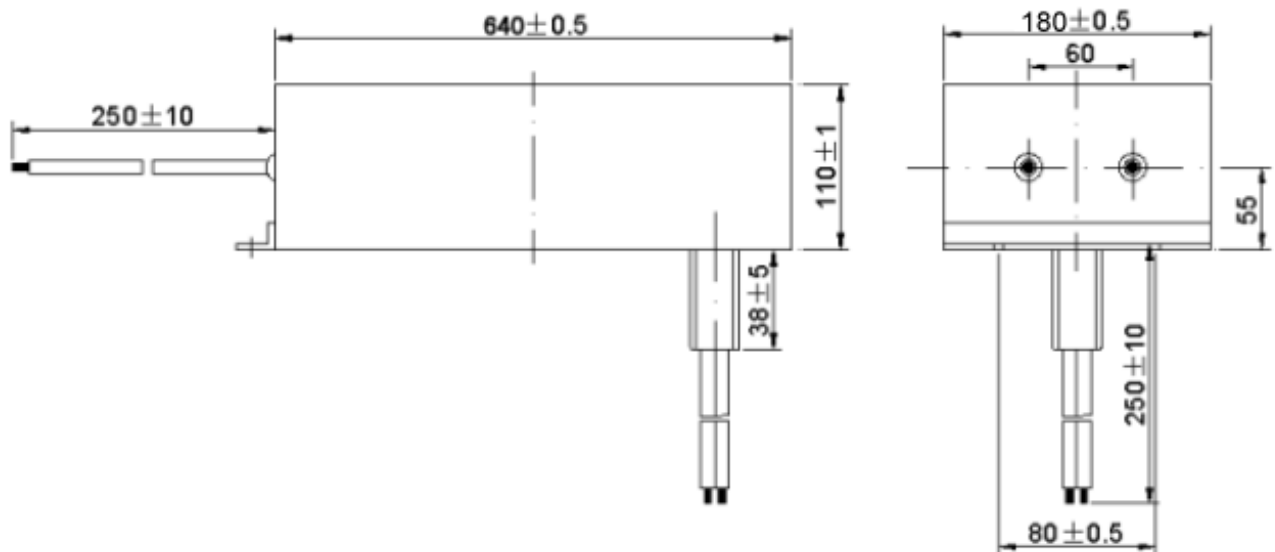

典型插入损耗 Typical insertion loss

频率	14K-18GHz
插入损耗 (dB) 共模	100dB

特点与应用 Features&Applications

工作频带宽，插入损耗高：Wide operating band, high insert loss

干扰抑制能力强：Strong ability for restraining interference

低压降，低漏电流：Low voltage drop, low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、electronic、square cabin、information security room、CT equipment of hospital、nuclear-magnetic、resonance room、SCR current converting equipment、power terminal of the equipments for power purification.