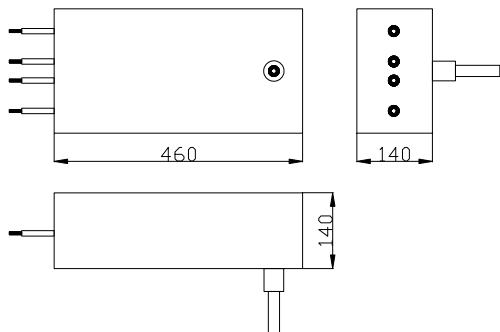


HM-4X50A 规格书 (三相四线交流电源滤波器)**◆ 技术参数 Specification**

额定电压 Rated voltage	380VAC
工作频率 Operating frequency	0~60Hz
额定电流 Rated current	50A
气候类别 Climatic category	25/070/21

试验电压 Test voltage (2s/1Min)线一线 Line-to-line: 1000VDC线一壳 Line-to-case: 1000VDC**典型插入损耗 Typical insertion loss**

频率 Frequency	150KHz~18GHz
插入损耗 (dB) Insertion loss (dB)	≥100dB
共模 Common mode	

◆ 外形尺寸 Dimension**◆ 特点与应用 Features & Applications**

工作频带宽，插入损耗高: Wide operating band, high insert loss

干扰抑制能力强: Strong ability for restrain interference

低压降，低漏电流: Low voltage drop , low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、electronic、square cabin、information security room 、CT equipment of hospital、nuclear-magnetic、resonance room、SCR current converting equipment、power terminal of the equipment for power purification.