


## HM-400DTC 规格书 (FeedThrough Filter 馈通滤波器)

### 1. Outline Drawing and Dimensions:( mm )

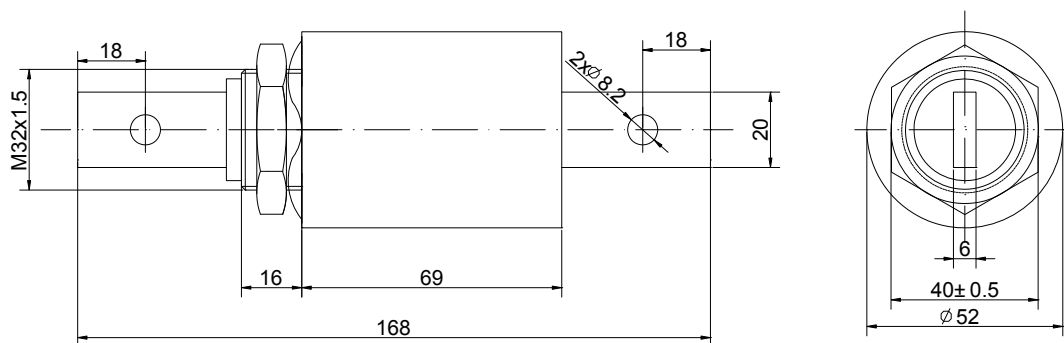

### 2. Specification:

Rated Voltage: 250VAC

Rated Current: 400A


Operating frequency : 50/60Hz

Test Voltage(5S): 2250VDC

Leakage current(250V/50Hz)  $\leq 0.4A$

Climatic Category: 40/085/56

### 3. Circuit Diagram:



$$C=4\mu F \pm 20\% (X2)$$

### 4. Insertion Loss in dB: (Measured in 50 $\Omega$ system )

